CTIcontrol
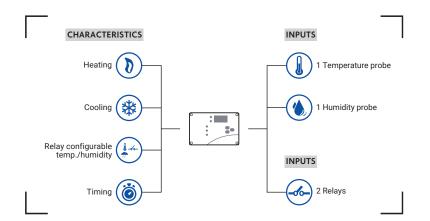
AGH | Thermostat + Hydrostat

DETAILS

• It allows to manage heating, cooling, timing and humidity.

• It can be configured for cooling or heating function.

• It has a relay to control the desired temperature.

• It has a relay to control the desired humidity.

• It can control the temperature from -20°C to 80°C by adding a temperature probe.

  • Resolution 0.1°C
  • Accuracy ± 0.2°C

• Humidity probe measures from 0 to 100% RH

  • Resolution 1%
  • Accuracy ± 1%

TECHNICAL SPECIFICATIONS

REFERENCE	AGH
INPUTS	1 Temperature probe 1 Humidity probe
OUTPUTS	2 Relays
VOLTAGE	230 V
MEASURES	170x132x82mm
IP PROTECTION	IP55
NORMATIVES	89/392/EEC – 73/336/EEC – 73/23/EEC

CHARACTERISTICS

Heating
Cooling
Relay configurable temp./humidity
Timing

INPUTS

1 Temperature probe
1 Humidity probe

INPUTS

2 Relays